




CS-RZ28YKA



New Chassis
New Indoor
Design

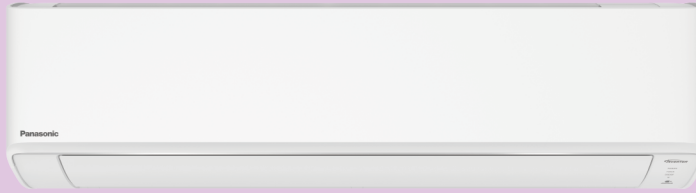

Wireless
Remote Control



7 Effects of unique nanoE™ X


Inhibits 5 types pollutants and deodorises

- Odours
- Bacteria & Viruses
- Mould
- Allergens
- Pollen
- Hazardous Substances

Moisturises Skin & Hair



Dust collection of PM2.5 with nanoE-G



Stay connected and in control anywhere, anytime

Manage at Ease Using Panasonic Comfort Cloud App

Intelligently Balances Energy Savings and Comfort

As each room in your home is different, ECO Mode with A.I. Control efficiently cools your room based on the amount of heat load contained.



Energy Saving

Comfort

*Comparison of ECO Mode & normal mode by using 3.5kW Inverter Model

Cooling Operating Temp Up To 46 °C

Delivers Powerful Cooling even in harsh environments

46 °C Ambient



Easy Breezy Installation & Servicing

EASY REMOVAL



User-friendly slider locks

EASY ACCESS



Built-in support holders

NEAT INSTALLATION



Screw holders for uneven surfaces

Specifications

Items	Cooling Capacity	Heating Capacity	Power Source	Power Input (Cooling Heating)	Running Current (Cooling Heating)	Air Volume (Cooling Heating)	Noise Level (Sound Pressure Level)		Dimensions		Net Weight		Piping Connection		Pipe Length		EER COP (Cooling Heating)
							Indoor(Hi/Lo) (Cooling Heating)	Outdoor(Hi) (Cooling Heating)	Indoor	Outdoor	Indoor	Outdoor	Gas Side	Liquid Side	Max. Length	Max. Height	
Indoor Outdoor	kW	kW	Phase V Hz	kW	A	m ³ /min	dB(A)	dB(A)	mm (H/W)	mm (H/W)	kg	kg	O.D. mm (inch)	O.D. mm (inch)	m	m	W/W
CS-RZ28YKA CU-RZ28YKA	7.5	8.6	1Ø 220 50	2.14 2.40	9.8 11.0	22.0 22.6	51 / 38 50 / 38	55 55	295 1,040 244	795 875 320	14	51	15.88 (5/8")	6.35 (1/4")	30	20	3.50 3.58

Pictures are for reference only. Specifications are subject to change without prior notice.

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB/15°C WB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB

* Installation, inspection or maintenance of the products should be carried out in compliance with the specified restrictions by the agents, suppliers or technicians who have experience in handling mildly flammable refrigerants.

* The installation restriction must be followed.



wallmount04/23